



Key Functions

- Auto Exposure, Auto White Balance
- Triple Stream(H.264, MPEG4, MJPEG)
- Onvif Profile S
- Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Cross Web Browsing(IE, Safari, Firefox, Chrome)
- Privacy Masking
- AIHM Event
- Event Buffering


Software

- SmartManager
- NC-Titanium
- Tive HD
- Titanium Plus VMS

Optional Accessory

- HJB200(Junction Box)

Dimension

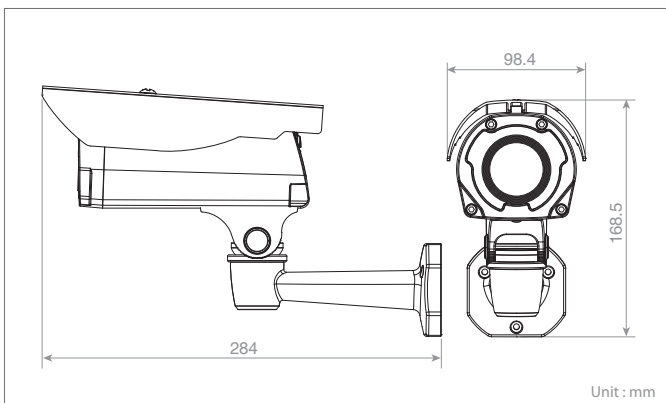

NUT-6331D

3MP Built-in IR LED Bullet Network Camera

Key Features

- 3MP(2048x1536) 20fps, Full HD(1920x1080) 30fps
- Vari-Focal 3.0~9.0mm Motorized Zoom Lens
- Smart Focus
- True Day & Night
- 36 IR LEDs For 25M Coverage
- SD Card Up to 32GB
- PoE, 12VDC, 24VAC
- IP67

Technical Specifications

Model	NUT-6331D	
IMAGE		
Lens	Motorized Zoom 3.0~9.0mm, F1.2	
Angle of View	99.0~33.5°(H)	
Image Sensor	Type	1/2.8" SONY Exmor CMOS Sensor
	Pixels	2,144(H)x1,588(V)
Min. Illumination	Color : 0.5 Lux@F1.2 50IRE, BW : 0 Lux@F1.2 50IRE(IR LED On)	
Scanning Mode	Progressive Scan	
Wide Dynamic Range	Digital WDR(ATR-EX)	
Day and Night Mode	True Day & Night(Auto, Day, Night)	
Noise Reduction	2DNR	
Digital Zoom	Yes(ROI)	
Exposure Control	Auto, Hold Current	
White Balance Control	Auto, Incandescent, Fluorescent, Outdoor	
Back Light Compensation	Yes	
Image Effect	Flip, Mirror	
Flicker Free Mode	50Hz, 60Hz	
Shutter Speed	Auto(1/20,000~1/30sec, 1/15, 1/8, 1/4 Slow Shutter), Manual	
IR Illuminator	Quantity	32 IR LEDs
	Angle	76°(H)
	Distance	Up to 25M
Shutter Speed	Yes	
VIDEO/AUDIO		
Compression	H.264(Baseline, Main, High Profile), MJPEG	
Bitrate Control	CBR, VBR	
Resolution	2048x1536, 1920x1080, 1280x720/1024, 704x480/576, 640x480, 352x240/288, 320x240	
Frame Rate	Max. 17/20fps@3MP, 25/30fps@Full-HD	
Streaming	17/20fps@3MP, 25/30fps@Full-HD(Triple Stream : H.264x2, MJPEGx1)	
Composite Out	Yes	
SYSTEM		
Motion Detection Area	16 Programmable Area(Include Area 8, Exclude Area 8)	
Privacy Mask Zone	8 Programmable Zone	
FTP Uploading	MJPEG	
Event Notification	E-mail, FTP, Notification Server, XML Notification, AIHM	
Login Authority	Administrator, Operator, Guest	
Event Buffering	FTP	Pre : 30sec, Post : 30sec
	SD Record	Pre : 10sec, Post : 60sec
Manual Trigger	4 Programmable Trigger	
Security	Multi User Authority, IP Filtering, HTTPS, SSL	
Network Time Sync	NTP Server, Synchronized Computer, Manual	
Software Reset	Restart, Reset, Factory Default	
Hardware Factory Reset	Yes	
Auto Recovery	Backup, Restore	
Remote Upgrade	Web Browsing(IE, Chrome, Safari, Firefox), SmartManager, NC-Titanium	
SD Recording Mode	Event, Continuous	
NETWORK		
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour	
Client Software	Web, SmartManager, NC-Titanium, Tive HD	
Max. User Connection	Live : 10 Users, Playback : 3 Users	
API Support	Open API, Onvif Compliance	
Mobile Support	Tive HD(Android, iOS)	
EXTERNAL IN/OUT		
Video Composite Out	3.5mm Stereo Jack	
Ethernet	RJ-45(10/100Base-T)	
u-SD Card	SDHC(Max. 32GB)	
OSD Remote Control	Wired Remote Controller(3.5mm Stereo Jack, Optional)	
ETC		
Operating Humidity	0~90%RH(Non-condensing)	
Operating Temperature	-10~+50 °C, -40~+50 °C with Heater	
Power Supply	PoE(IEEE802.3af compliance, Class0), 12VDC	
Power Consumption	160mA(7.6W)@PoE, 550mA(6.6W)@12VDC, 2000mA(24.0W)@12VDC(With Heater)	
Dimension	98.4(W)x168.5(H)x284(L)mm	
Net Weight	1,100g	
Ingress Protection	IP67	

Specifications are subject to change without notice.